
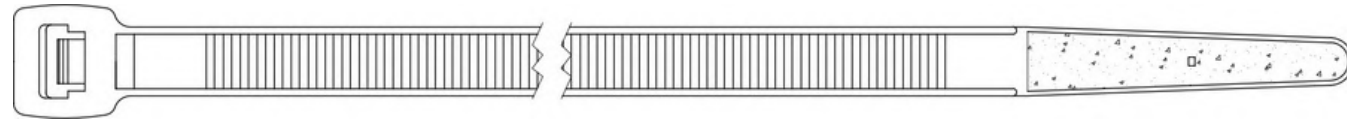
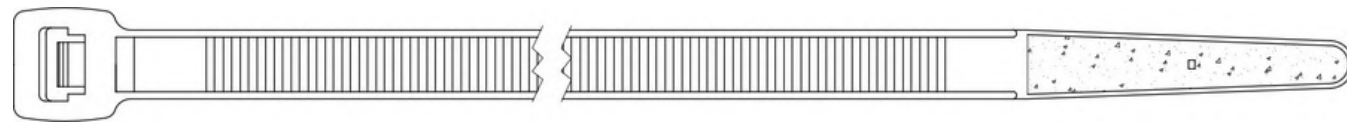


# Standard **COBRA** Cable Ties PA6.6



Black Code	Natural Code	Description	Size (mm)	Max. bundle Ø (mm)	Guaranteed min. tensile strength (kg)	Box Qty Pcs.
9031	9030	PA66 CABLE TIE	80 x 2,4	17	8	30.000
9051	9050	PA66 CABLE TIE	100 x 2,5	22	8,1	30.000
9071	9070	PA66 CABLE TIE	140 x 2,5	34	8,1	25.000
9081	9080	PA66 CABLE TIE	200 x 2,5	53	8,1	20.000
9091	9090	PA66 CABLE TIE	160 x 2,5	40	8,1	20.000
9131	9130	PA66 CABLE TIE	140 x 3,6	33	18,2	20.000
9151	9150	PA66 CABLE TIE	200 x 3,6	51	18,2	12.000
9161	9160	PA66 CABLE TIE	290 x 3,6	80	18,2	12.000
9171	9170	PA66 CABLE TIE	360 x 3,6	102	18,2	9.000
9181	9180	PA66 CABLE TIE	250 x 3,6	67	18,2	12.000
9211	9210	PA66 CABLE TIE	200 x 4,5	50	22,2	12.000
9241	9240	PA66 CABLE TIE	160 x 4,8	38	22,2	10.000
9251	9250	PA66 CABLE TIE	175 x 4,8	42	22,2	10.000
9261	9260	PA66 CABLE TIE	200 x 4,8	50	22,2	10.000
9271	9270	PA66 CABLE TIE	250 x 4,8	66	22,2	10.000
9281	9280	PA66 CABLE TIE	290 x 4,8	78	22,2	10.000
9291	9290	PA66 CABLE TIE	360 x 4,8	100	22,2	7.500
9301	9300	PA66 CABLE TIE	430 x 4,8	123	25,8	5.000
9321	9320	PA66 CABLE TIE	530 x 4,8	155	25,8	3.000
9411	9410	PA66 CABLE TIE	200 x 7,6	49	54,4	5.000
9421	9420	PA66 CABLE TIE	250 x 7,6	64	54,4	5.000
9431	9430	PA66 CABLE TIE	290 x 7,6	77	54,4	5.000
9441	9440	PA66 CABLE TIE	360 x 7,6	98	54,4	4.000
9451	9450	PA66 CABLE TIE	450 x 7,6	127	54,4	3.000
9461	9460	PA66 CABLE TIE	530 x 7,6	152	54,4	2.500
9481	9480	PA66 CABLE TIE	650 x 7,6	189	54,4	2.000
9471	9470	PA66 CABLE TIE	750 x 7,6	218	54,4	2.000
9511	9510	PA66 CABLE TIE	530 x 9	150	79,8	2.000
9521	9520	PA66 CABLE TIE	780 x 9	228	79,8	1.500
9541	9540	PA66 CABLE TIE	1500 x 9	460	79,8	500
9591	9590	PA66 CABLE TIE	1000 x 12,6	295	114	600

# Standard **COBRA** Cable Ties PA6.6



## TEMPERATURE OF USE:

of exercise -	-40°C + 85°C
of assembly	-10°C + 60°C
maximum tip assimilable for short periods	+ 110°C
of fusion	+256°C
held to the flame *	true to law UL 94 class V2
absorption humidity	2,7% (in exposure to the air with 50% of U.R.)

\* Classified material UL94V2 are used for all polyamide 6.6 cable ties



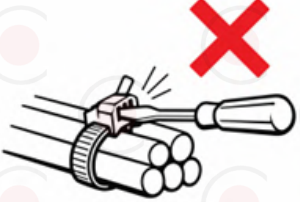
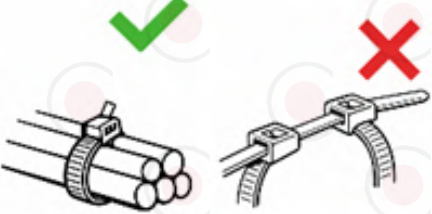
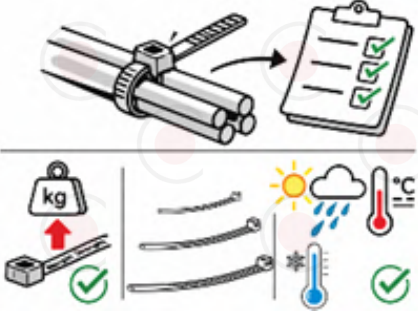


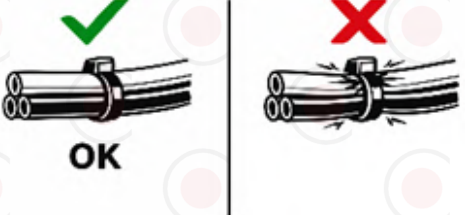


# Safety Instructions for the Use of **COBRA**<sup>CABLE TIES</sup>

Cobra® Cable Ties are designed as non-releasable plastic fastening elements intended for bundling and securing cables or similar components. They are engineered for single-use applications and are not intended to be reopened once tightened.

Cobra® cable ties must be used exclusively for their intended fastening applications, strictly adhering to standard installation practices and applicable safety regulations. Failure to comply with these instructions may result in equipment damage, the voiding of certified performance warranties, or personal injury.

Always ensure that the product is used in accordance with applicable safety regulations and installation standards.

For further technical information or application guidelines, please contact Cieffeplast Srl at [info@cieffeplast.com](mailto:info@cieffeplast.com).

Icon	Instructions
	<p>Do not attempt to reopen a cable tie once it has been tightened. Standard Cobra® cable ties are designed for permanent locking and can only be removed by cutting them with appropriate cutting tools. If a releasable fastening system is required, please use reusable cable ties specifically equipped with a release mechanism for repeated opening and closing.</p>
	<p>Mechanical performance and certifications (such as CE or UL, where applicable) apply to single, correctly installed cable ties. The use of multiple interlinked cable ties or non-standard configurations will void performance warranties.</p>
	<p>Always select cable ties with the appropriate tensile strength, material composition, and environmental resistance (temperature fluctuations, UV exposure, chemicals, etc.) for the intended application.</p>
	<p>Do not use cable ties on body parts. Improper use can lead to strangulation or impaired blood circulation.</p>
	<p>Keep cable ties out of the reach of children. This product is not a toy and may pose a choking or strangulation hazard.</p>
	<p>Do not overtighten the cable tie, as excessive tension may damage cables, insulation jackets, or the bundled components.</p>
	<p>Use appropriate installation tools (e.g. cable tie pliers) and personal protective equipment.</p>
	<p>For the proper disposal of packaging, please refer to the information accessible via the QR code and printed directly on the packaging.</p>