


Coloured **COBRA** Cable Ties PA6.6




Other colors available on demand.
more sizes are available in natural
and black color.

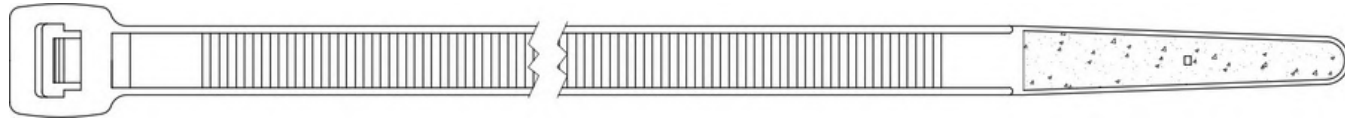


Yellow Code	Description	Size (mm)	Max. bundle Ø (mm)	Guaranteed min. tensile strength (kg)	Box Qty
9052C	PA66 CABLE TIE	100 x 2,5	22	8,1	5.000
9132C	PA66 CABLE TIE	140 x 3,6	33	18,2	5.000
9152C	PA66 CABLE TIE	200 x 3,6	51	18,2	5.000
9262C	PA66 CABLE TIE	200 x 4,8	50	22,2	5.000
9282C	PA66 CABLE TIE	290 x 4,8	78	22,2	5.000



Red Code	Description	Size (mm)	Max. bundle Ø (mm)	Guaranteed min. tensile strength (kg)	Box Qty
9053C	PA66 CABLE TIE	100 x 2,5	22	8,1	5.000
9133C	PA66 CABLE TIE	140 x 3,6	33	18,2	5.000
9153C	PA66 CABLE TIE	200 x 3,6	51	18,2	5.000
9153C	PA66 CABLE TIE	200 x 4,8	50	22,2	5.000
9153C	PA66 CABLE TIE	290 x 4,8	78	22,2	5.000




Blue Code	Description	Size (mm)	Max. bundle Ø (mm)	Guaranteed min. tensile strength (kg)	Box Qty
9054C	PA66 CABLE TIE	100 x 2,5	22	8,1	5.000
9134C	PA66 CABLE TIE	140 x 3,6	33	18,2	5.000
9154C	PA66 CABLE TIE	200 x 3,6	51	18,2	5.000
9264C	PA66 CABLE TIE	200 x 4,8	50	22,2	5.000
9284C	PA66 CABLE TIE	290 x 4,8	78	22,2	5.000



Green Code	Description	Size (mm)	Max. bundle Ø (mm)	Guaranteed min. tensile strength (kg)	Box Qty
9055C	PA66 CABLE TIE	100 x 2,5	22	8,1	5.000
9135C	PA66 CABLE TIE	140 x 3,6	33	18,2	5.000
9155C	PA66 CABLE TIE	200 x 3,6	51	18,2	5.000
9265C	PA66 CABLE TIE	200 x 4,8	50	22,2	5.000
9285C	PA66 CABLE TIE	290 x 4,8	78	22,2	5.000


Coloured **COBRA** Cable Ties PA6.6

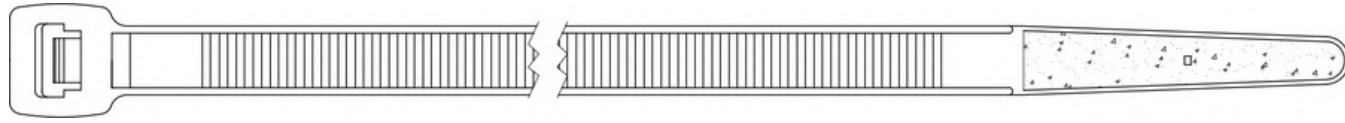


Other colors available on demand.
more sizes are available in natural
and black color.



Orange Code	Description	Size (mm)	Max. bundle Ø (mm)	Guaranteed min. tensile strength (kg)	Box Qty
9057C	PA66 CABLE TIE	100 x 2,5	22	8,1	5.000
9137C	PA66 CABLE TIE	140 x 3,6	33	18,2	5.000
9157C	PA66 CABLE TIE	200 x 3,6	51	18,2	5.000
9267C	PA66 CABLE TIE	200 x 4,8	50	22,2	5.000
9287C	PA66 CABLE TIE	290 x 4,8	78	22,2	5.000



Brown Code	Description	Size (mm)	Max. bundle Ø (mm)	Guaranteed min. tensile strength (kg)	Box Qty
9058C	PA66 CABLE TIE	100 x 2,5	22	8,1	5.000
9138C	PA66 CABLE TIE	140 x 3,6	33	18,2	5.000
9158C	PA66 CABLE TIE	200 x 3,6	51	18,2	5.000
9268C	PA66 CABLE TIE	200 x 4,8	50	22,2	5.000
9288C	PA66 CABLE TIE	290 x 4,8	78	22,2	5.000





Grey Code	Description	Size (mm)	Max. bundle Ø (mm)	Guaranteed min. tensile strength (kg)	Box Qty
905AC	PA66 CABLE TIE	100 x 2,5	22	8,1	5.000
913AC	PA66 CABLE TIE	140 x 3,6	33	18,2	5.000
915AC	PA66 CABLE TIE	200 x 3,6	51	18,2	5.000
926AC	PA66 CABLE TIE	200 x 4,8	50	22,2	5.000
928AC	PA66 CABLE TIE	290 x 4,8	78	22,2	5.000



Pink Code	Description	Size (mm)	Max. bundle Ø (mm)	Guaranteed min. tensile strength (kg)	Box Qty
905HC	PA66 CABLE TIE	100 x 2,5	22	8,1	5.000
913HC	PA66 CABLE TIE	140 x 3,6	33	18,2	5.000
915HC	PA66 CABLE TIE	200 x 3,6	51	18,2	5.000
926HC	PA66 CABLE TIE	200 x 4,8	50	22,2	5.000
928HC	PA66 CABLE TIE	290 x 4,8	78	22,2	5.000

Coloured **COBRA** Cable Ties PA6.6

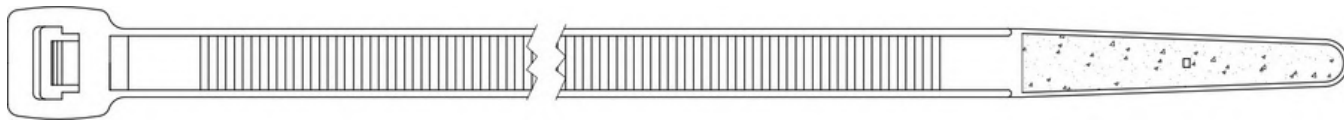

TEMPERATURE OF USE:

of exercise -	-40°C + 85°C
of assembly	-10°C + 60°C
maximum tip assimilable for short periods	+ 110°C
of fusion	+256°C
held to the flame *	true to law UL 94 class V2
absorption humidity	2,7% (in exposure to the air with 50% of U.R.)

* Classified material UL94V2 are used for all polyamide 6.6 cable ties











Safety Instructions for the Use of **COBRA**^{CABLE TIES}

Cobra® Cable Ties are designed as non-releasable plastic fastening elements intended for bundling and securing cables or similar components. They are engineered for single-use applications and are not intended to be reopened once tightened.

Cobra® cable ties must be used exclusively for their intended fastening applications, strictly adhering to standard installation practices and applicable safety regulations. Failure to comply with these instructions may result in equipment damage, the voiding of certified performance warranties, or personal injury.

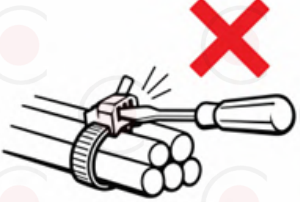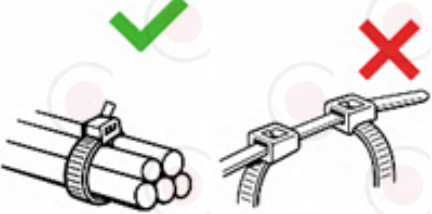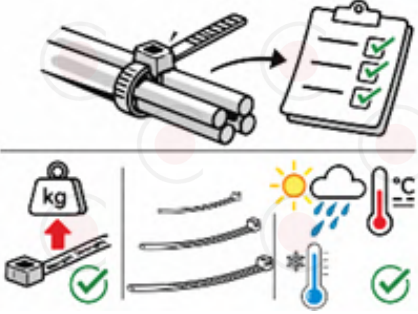Always ensure that the product is used in accordance with applicable safety regulations and installation standards.

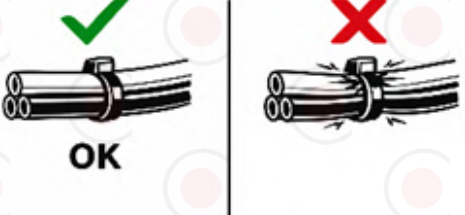For further technical information or application guidelines, please contact Cieffeplast Srl at info@cieffeplast.com.

Icon	Instructions
	<p>Do not attempt to reopen a cable tie once it has been tightened. Standard Cobra® cable ties are designed for permanent locking and can only be removed by cutting them with appropriate cutting tools. If a releasable fastening system is required, please use reusable cable ties specifically equipped with a release mechanism for repeated opening and closing.</p>
	<p>Mechanical performance and certifications (such as CE or UL, where applicable) apply to single, correctly installed cable ties. The use of multiple interlinked cable ties or non-standard configurations will void performance warranties.</p>
	<p>Always select cable ties with the appropriate tensile strength, material composition, and environmental resistance (temperature fluctuations, UV exposure, chemicals, etc.) for the intended application.</p>
	<p>Do not use cable ties on body parts. Improper use can lead to strangulation or impaired blood circulation.</p>
	<p>Keep cable ties out of the reach of children. This product is not a toy and may pose a choking or strangulation hazard.</p>
	<p>Do not overtighten the cable tie, as excessive tension may damage cables, insulation jackets, or the bundled components.</p>
	<p>Use appropriate installation tools (e.g. cable tie pliers) and personal protective equipment.</p>
	<p>For the proper disposal of packaging, please refer to the information accessible via the QR code and printed directly on the packaging.</p>